


### DESCRIPTION:

High-performance carton sealing tape designed for reliable bonding and secure box closure. It combines a tough biaxially oriented polypropylene (BOPP) film with a high-tack hot-melt adhesive, providing excellent adhesion to a wide range of corrugated and paperboard surfaces. This tape offers consistent unwind, strong holding power, and superior performance in both manual and automatic case sealing applications.

Complies with the FDA 21 CFR 175.105 Subpart B for "Indirect Contact" food packaging.

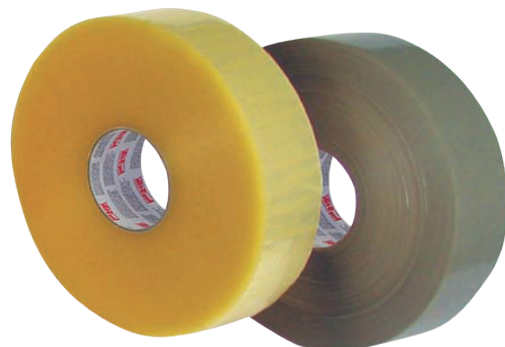

\*Product presentation may be different than picture.

### SPECIALLY DESIGNED FOR:



CARTON SEALING



BUNDLING



GENERAL PACKAGING

### PRODUCT ATTRIBUTES

Thickness mils(mm)	Adhesion to Backing oz/in (gr/cm)	Adhesion to steel oz/in (gr/cm)	Tensile Strength lb/in (kg/cm)	Elongation (%)
2.0 (0.050)	9 (100)	51 (570)	25 (4.5)	160

Note: All figures shown are typical average values obtained from evaluations to fresh cut rolls and should not be considered as guaranteed specifications. Customer's entire responsibility is to ensure that product is suitable for the intended use.

### CONSTRUCTION:

STANDARD LENGTH (mm x m)	BACKING	COLOR	ADHESIVE:
 48 x 100    48 x 914 72 x 100    72 x 914	 BOPP	 CLEAR, TAN	 HOT-MELT

### Guarantee:

Hystik guarantees its tapes to be free from defects in materials and workmanship. This guarantee does not cover product performance for any specific goal, purpose, or application, nor does it include issues arising from the method of use, user habits, or particular application practices. It is the buyer's responsibility to determine whether the product is suitable for their specific intended use.

884-HM CARTON SEALING TAPE, NOV/2025